

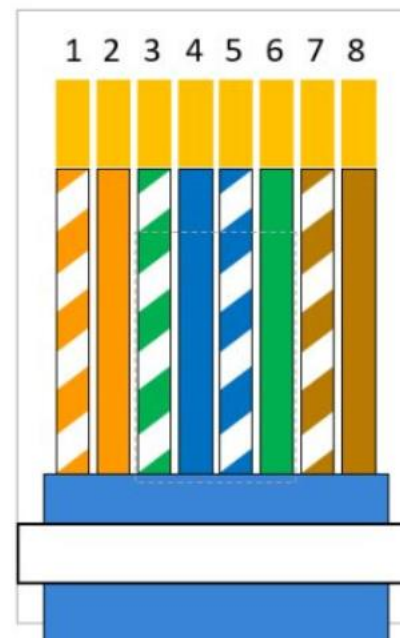


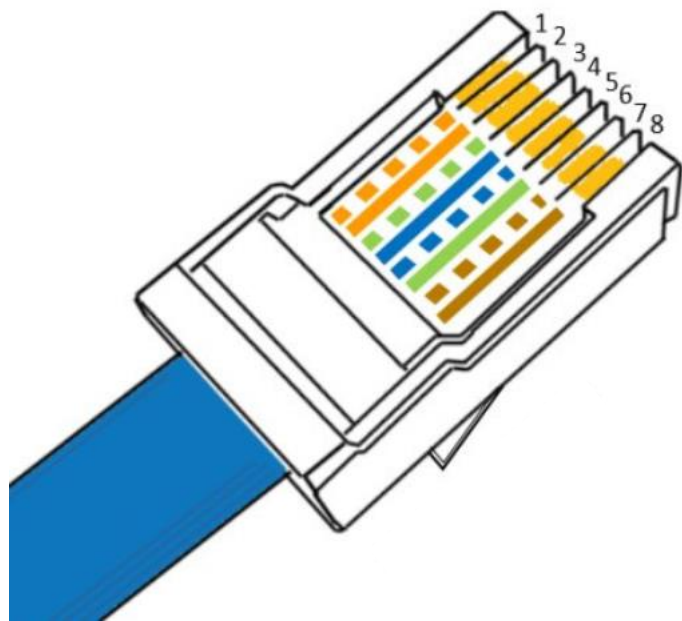

HINAESS Battery: **Hi-5(GEN2),PowerGem,PowerGem Plus** Connection Options with Inverters

Victron

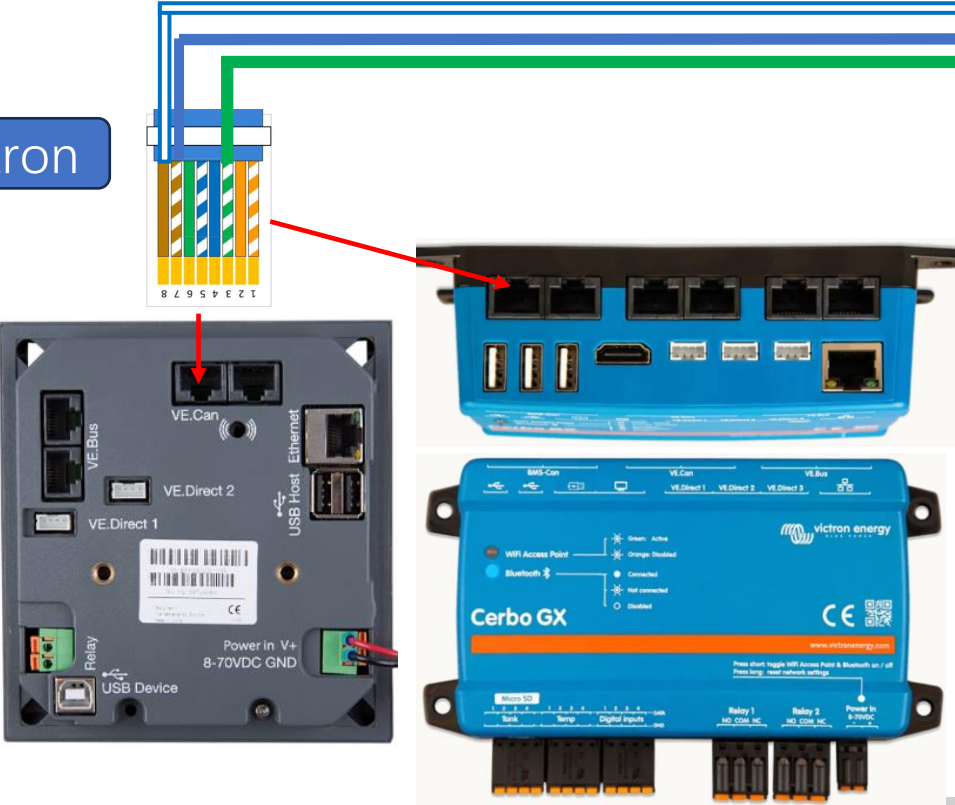

Battery	Victron	
pin	pin	
4	7	H
5	8	L
6	3	GND


CCGX:
CAN --VE .Can
Cerbo GX:
CAN --BMS.Can

Select CAN BUS 500K

BAT DIP:000000
always for both the
master and slaves




HINAESS Battery: **Hi-5(GEN2),PowerGem,PowerGem Plus**” Connection Options with Inverters

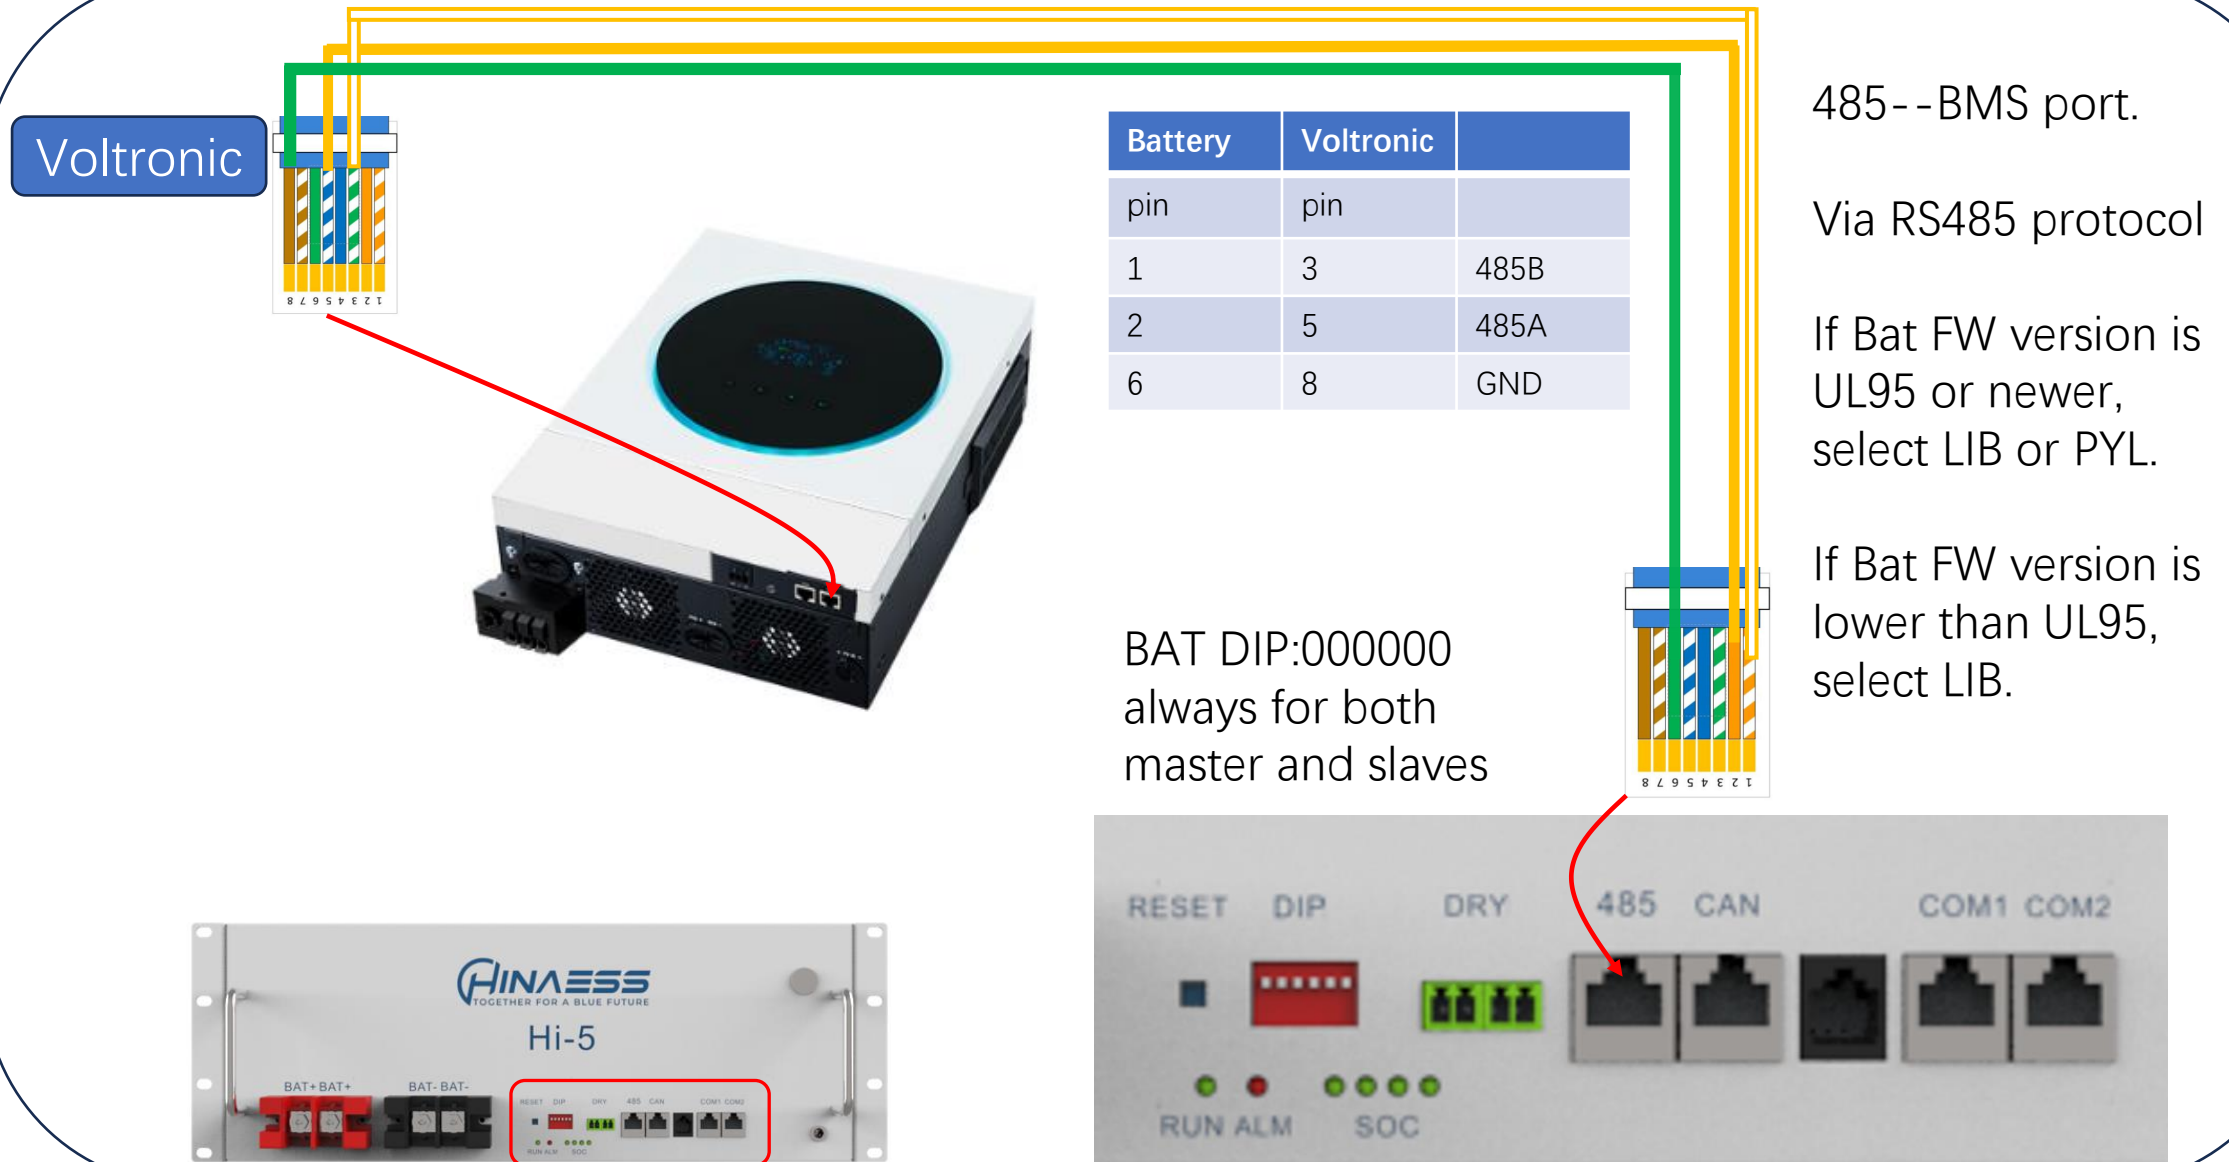

HINAESS Battery: **Hi-5(GEN2),PowerGem,PowerGem Plus** Connection Options with Inverters

Growatt
3-5K ES

Standard Straight comm cable

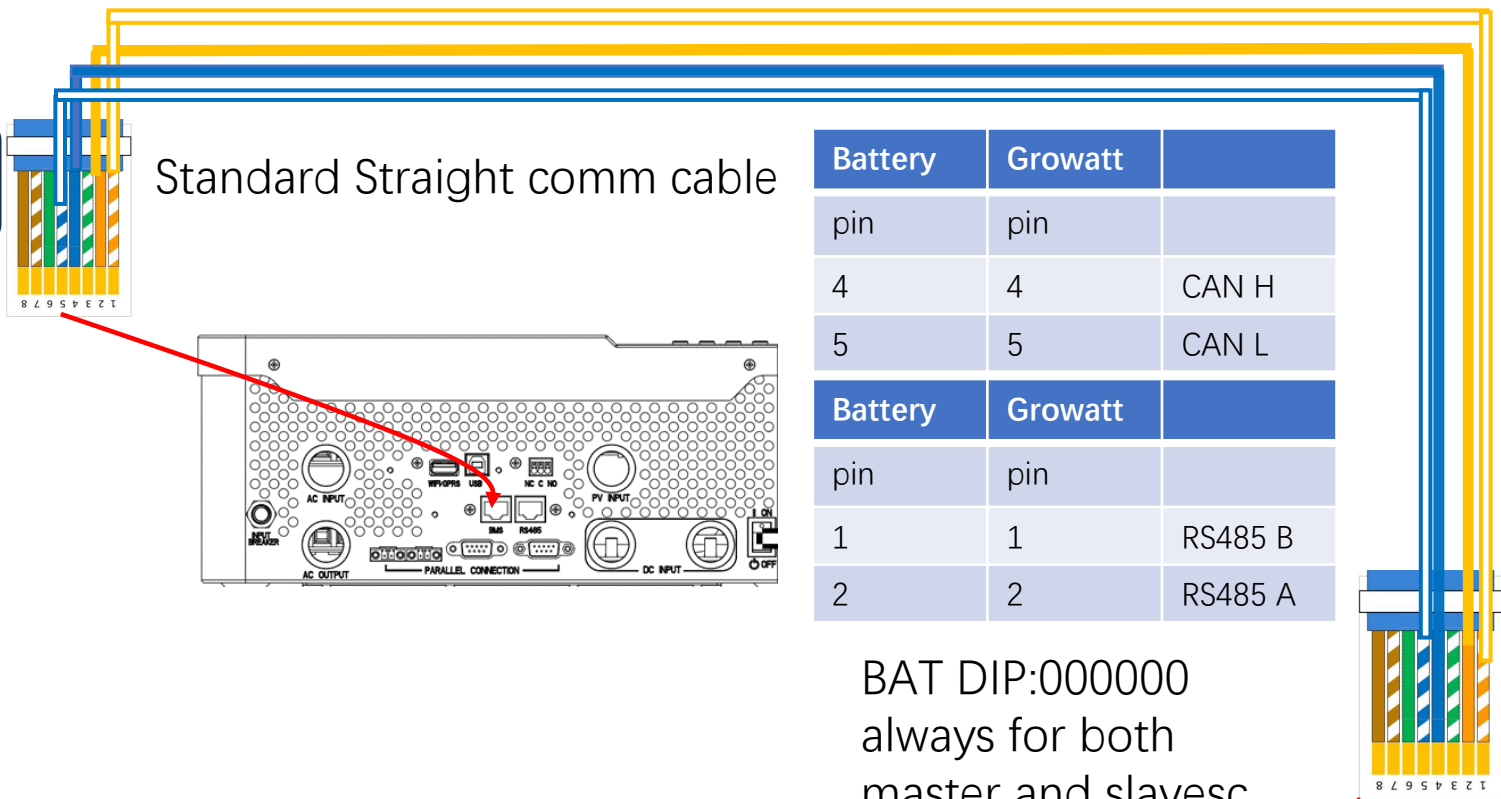


Battery	Growatt	
pin	pin	
4	4	CAN H
5	5	CAN L

Battery	Growatt	
pin	pin	
1	1	RS485 B
2	2	RS485 A

BAT DIP:000000
always for both
master and slavesc




HINAESS Battery: **Hi-5(GEN2),PowerGem,PowerGem Plus**” Connection Options with Inverters

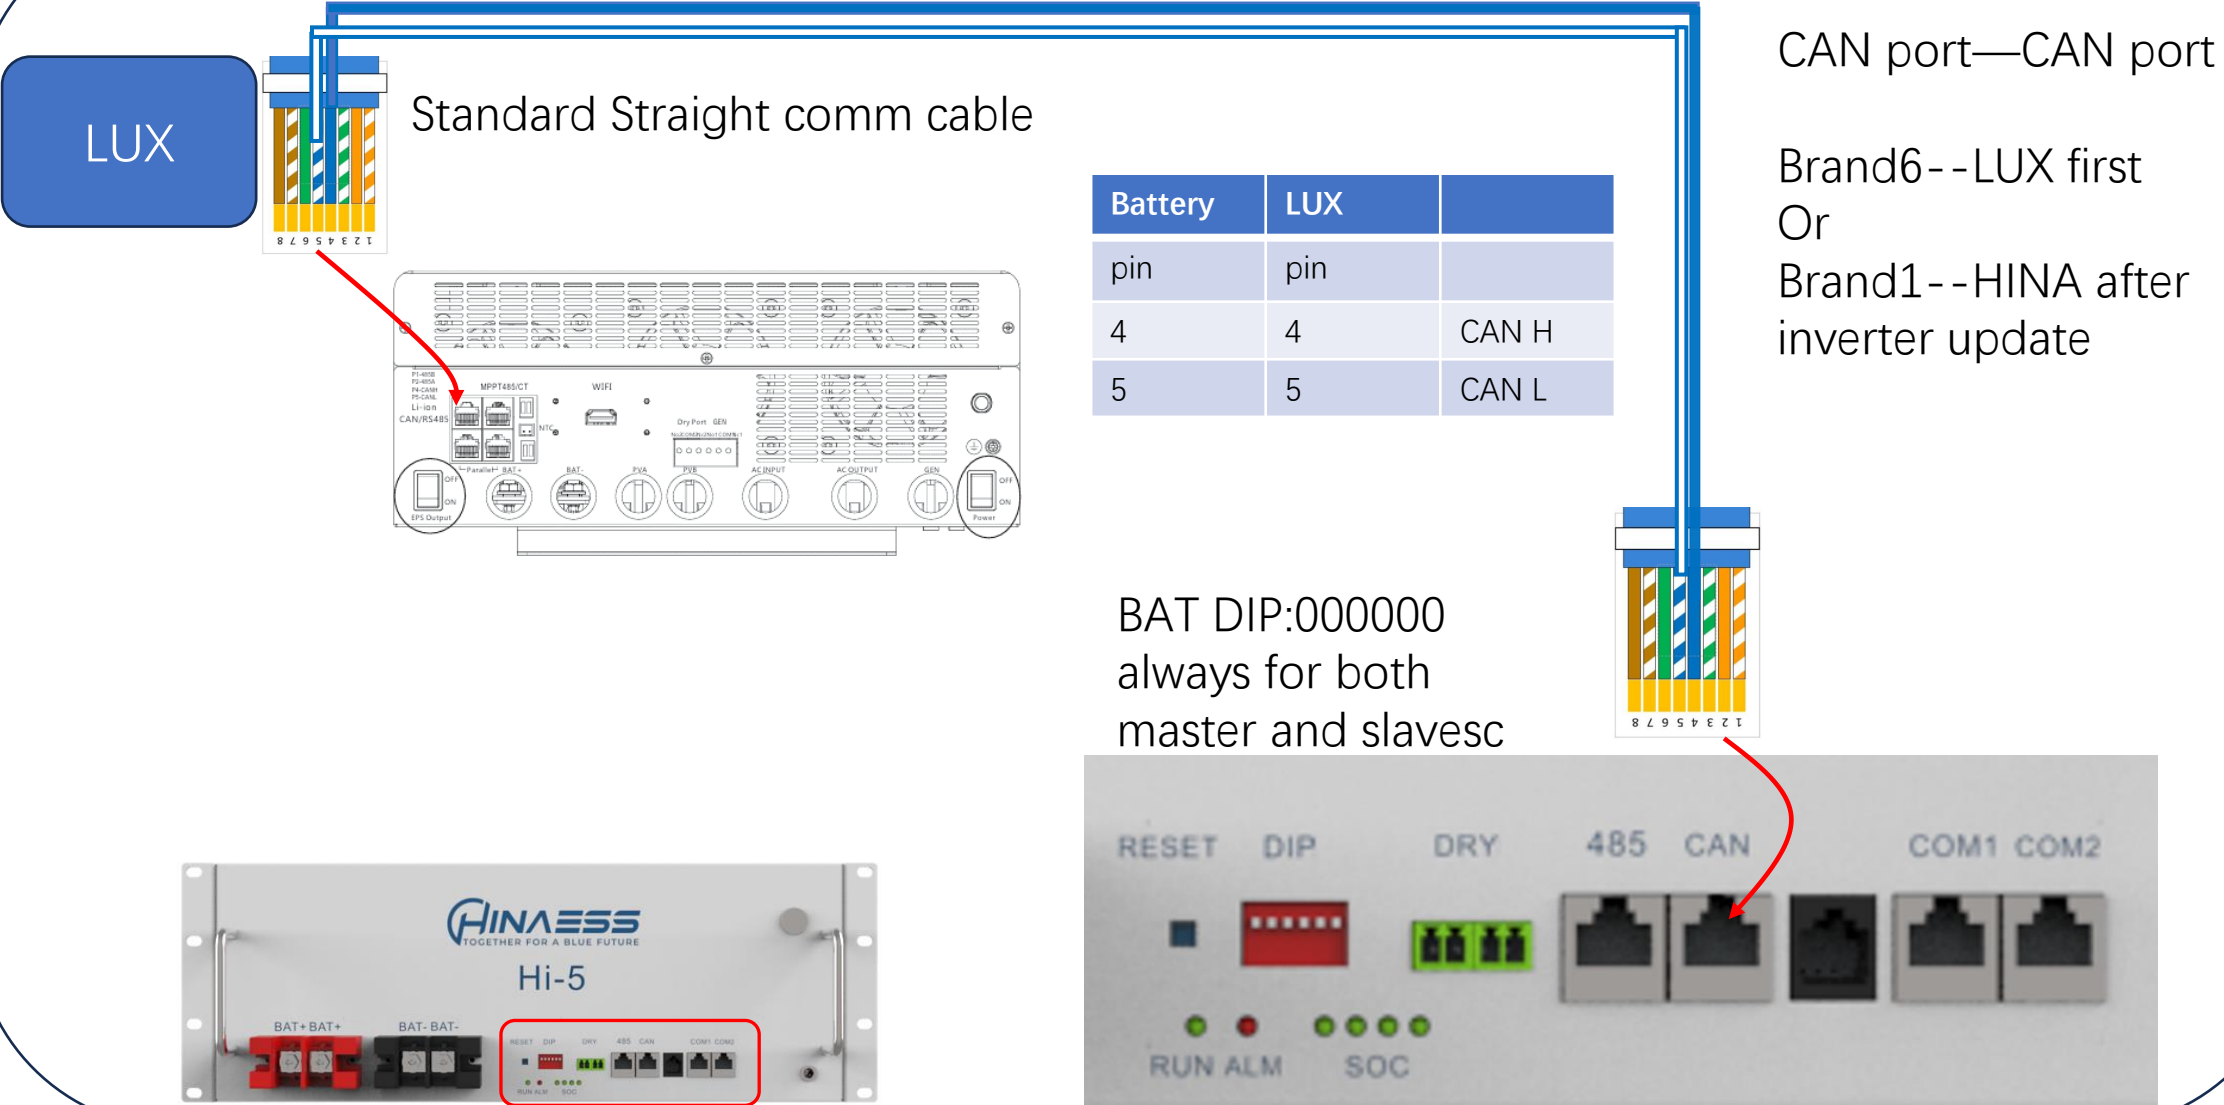


HINAESS Battery: **Hi-5(GEN2),PowerGem,PowerGem Plus** Connection Options with Inverters

DEYE
Sunsynk

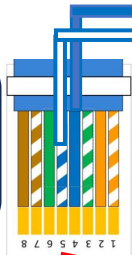

Standard Straight comm cable

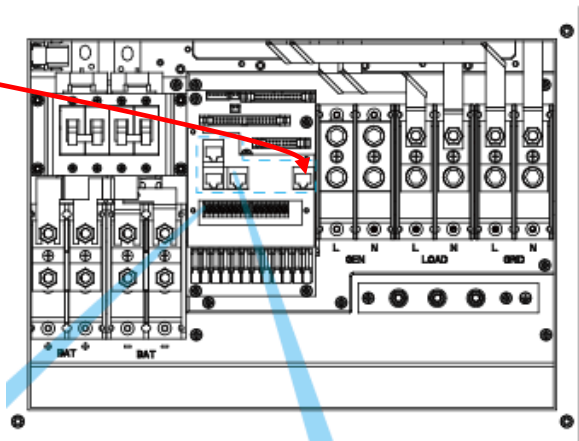

Battery	DEYE	
pin	pin	
4	4	CAN H
5	5	CAN L

CAN port—CAN port

Lithium-00

BAT DIP:000000
always for both
master and slavesc

