



# Hi-11.8

51.2V/230Ah/11.776kWh

**0.43**  
C-rate Continuous Power


**10**  
Year Warranty

**32**  
Units Stackable

**20**  
IP20 for Outdoor Use

## FEATURES

- Parallel up to 32 modules.
- Auto addressing when parallel.
- Wide range inverter compatibility.
- 0.5C rate continuous charge/discharge.
- Ultra safe LFP material, 10 year warranty.
- Handy monitor & flexible remote upgrade.
- Second level protection, robust applications.
- Smart BMS management for longer lifespan.
- Active balancing charging, low self consumption.
- Heating system & Fire suppression optional, designed for outdoor use & extreme weather.

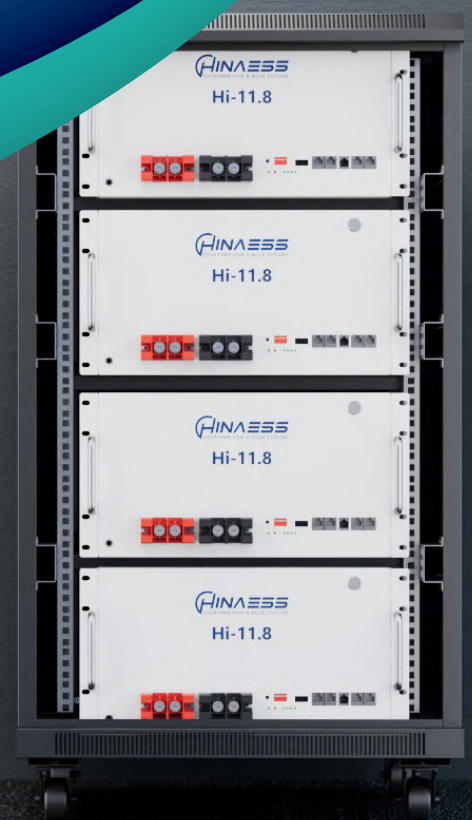

Guiyang, China

info@hinaess.com

www.hinaess.com



## Model Name

Hi-11.8

Cell Type	LFP
Rated Power	11.776kWh
Rated Capacity	230Ah
Rated Voltage	51.2V
Charge Voltage (Vdc)	57.2V
Battery Charge Current(A)	100(max continuous) 102(start limit current to 10A, retest every 10 minutes) 105(peak1 15S), 110(peak2 500ms)
Battery Discharge Current(A)	100(max continuous) 104(start giving over-current alarm but not stop discharging) 105(peak1 5minutes), 150(peak2 500ms)
Parallel	Up to 32 units parallel w/o extra device needed, 100 units parallel with hub, slave battery dropoffline or come back alive does not affect system running
IP Level	IP20
Dimension(W*D*H,mm)	396*600*229mm
Weight	81Kg
Communication	CAN/RS485
Robust Applications	Auto-addressing and stronger protection
DOD	90%
Cycles	6000
Compatible Inverter	Victron, Luxpower, Deye, Voltronic, SMA, Goodwe, Growatt, Sofar, Solark, SRNE, Must
Humidity	5%-85% RH (No condensation)
Work Temperature	-20 °C ~ +55 °C
Storage Temperature	-10 °C ~ +35 °C
Remote Maintenance	Flexible remote upgrade, Original firmware backup to prevent upgrade failure
Warranty *	10 year, 6000 cycles
Certification	CE UN38.3 IEC62619
Protection	Over charge/discharge/current/voltage/temperature protection Short circuit protection, Reverse connection protection, Charge balance, Low SOC protection

\*@ 25°C, 90% Dod, 0.5C testing condition